




Samsung Galaxy S6 Edge Motherboard Removal

prereq only

Written By: Sam Lionheart

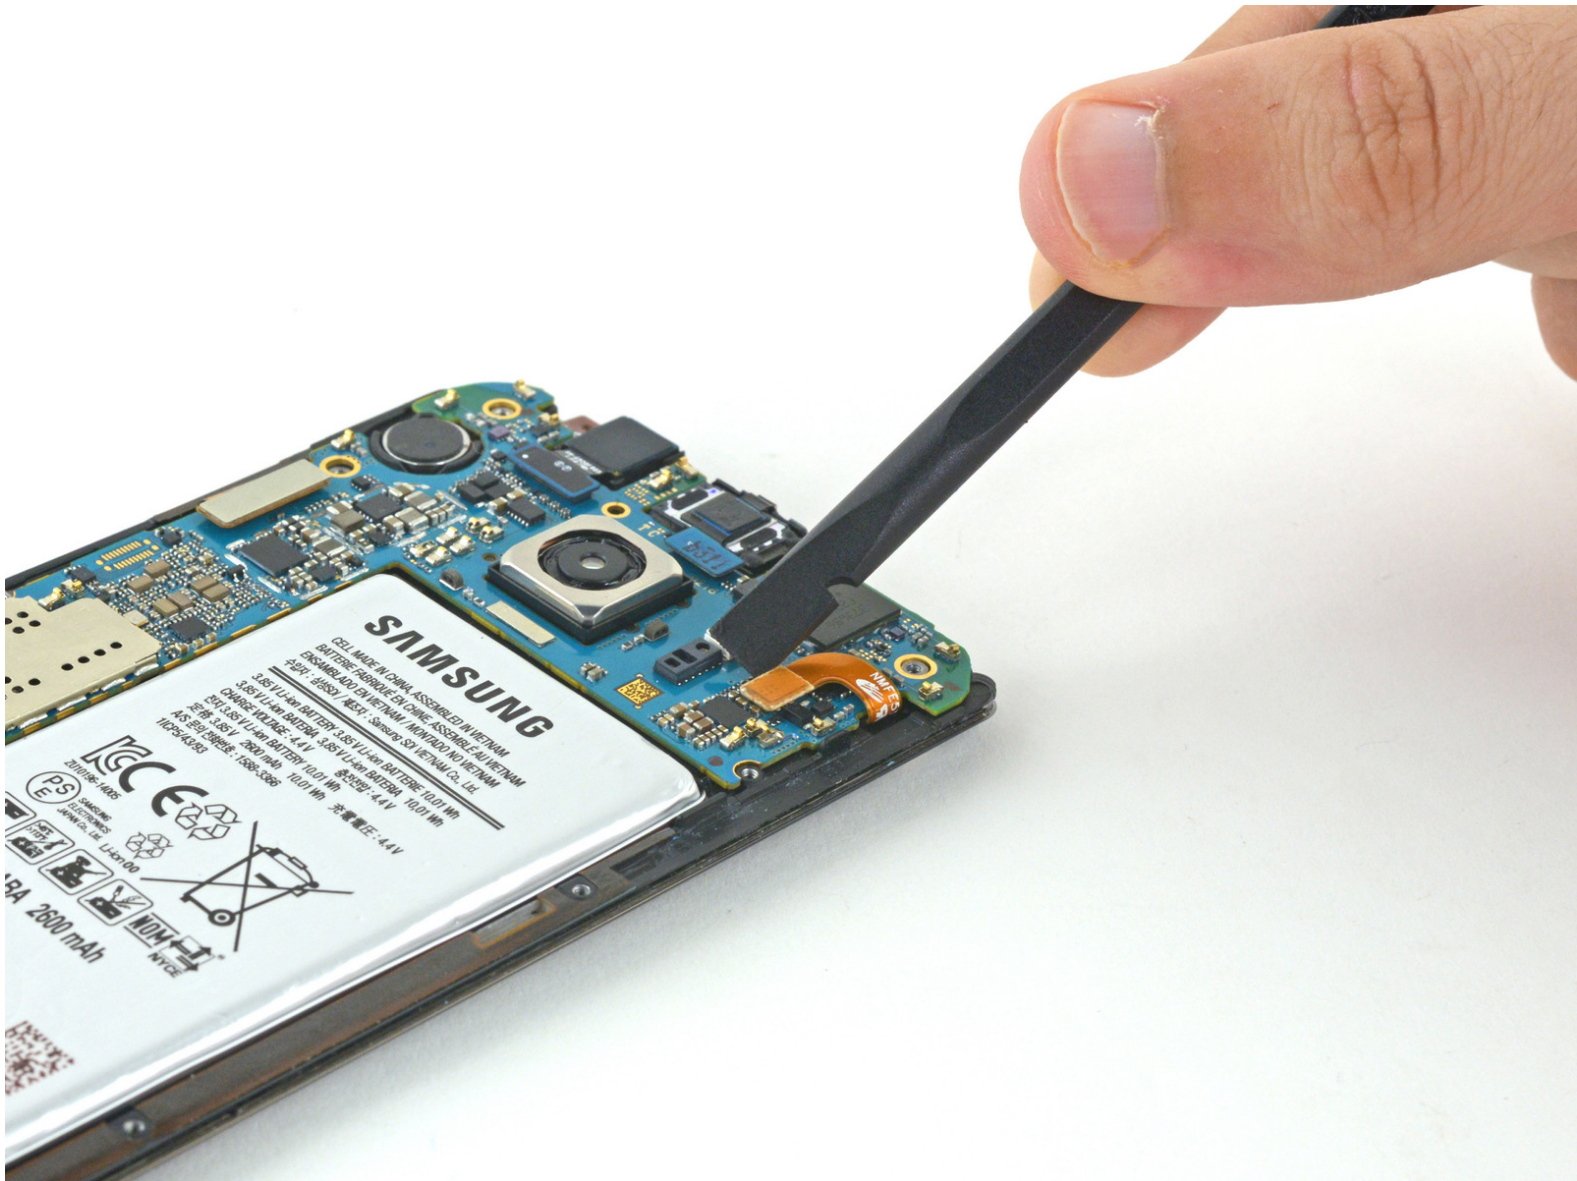

INTRODUCTION



prereq only



TOOLS:



- [SIM Card Eject Tool](#) (1)
 - [iOpener](#) (1)
 - [Heavy-Duty Suction Cups \(Pair\)](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Precision Tweezers Set](#) (1)
-

Step 1 — Motherboard Removal

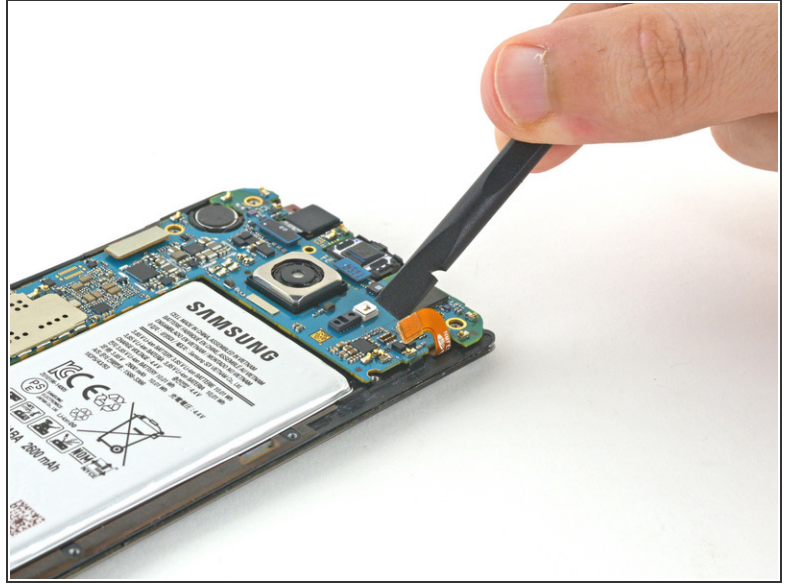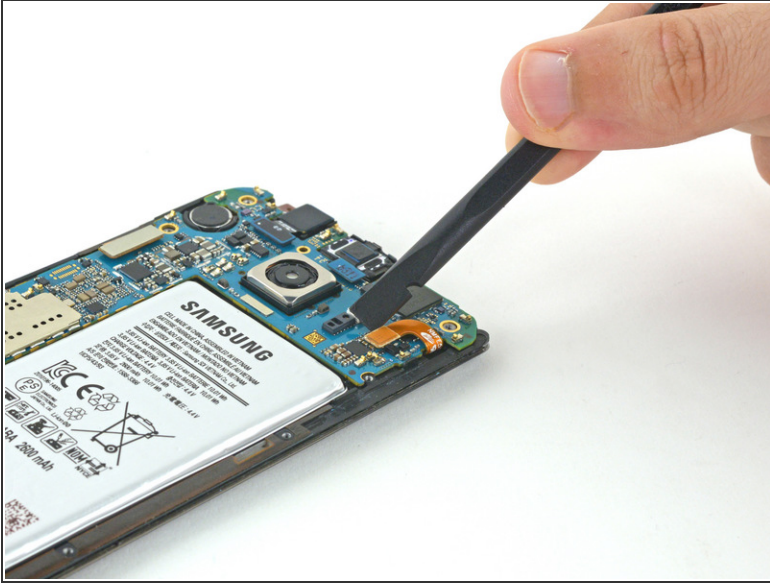

- Using the flat end of the spudger, disconnect the battery ribbon cable from the motherboard.

Step 2

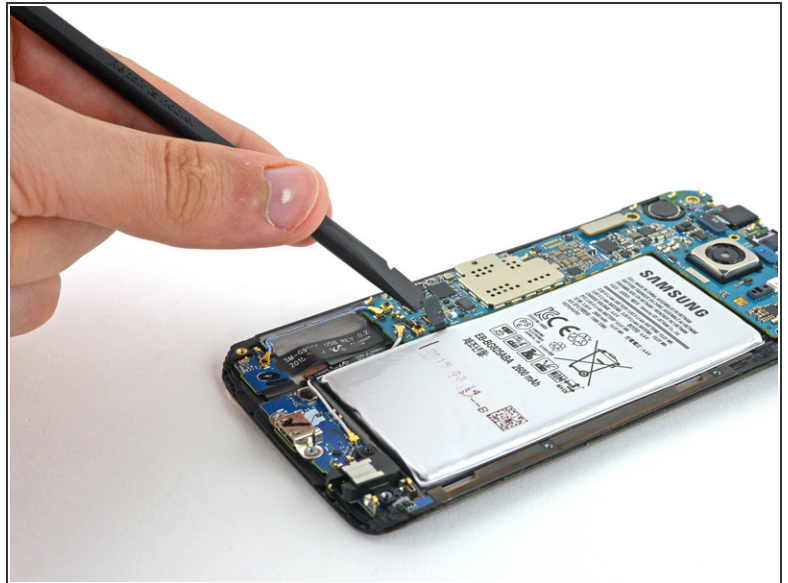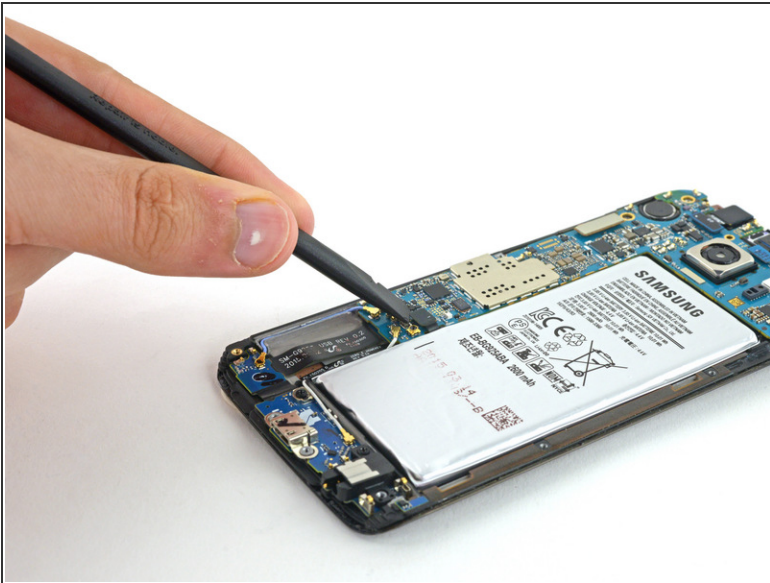


- Disconnect the home button ribbon cable from the motherboard.

Step 3




- Use the pointed end of a spudger to disconnect the two antenna interconnect cables from the motherboard.

Step 4

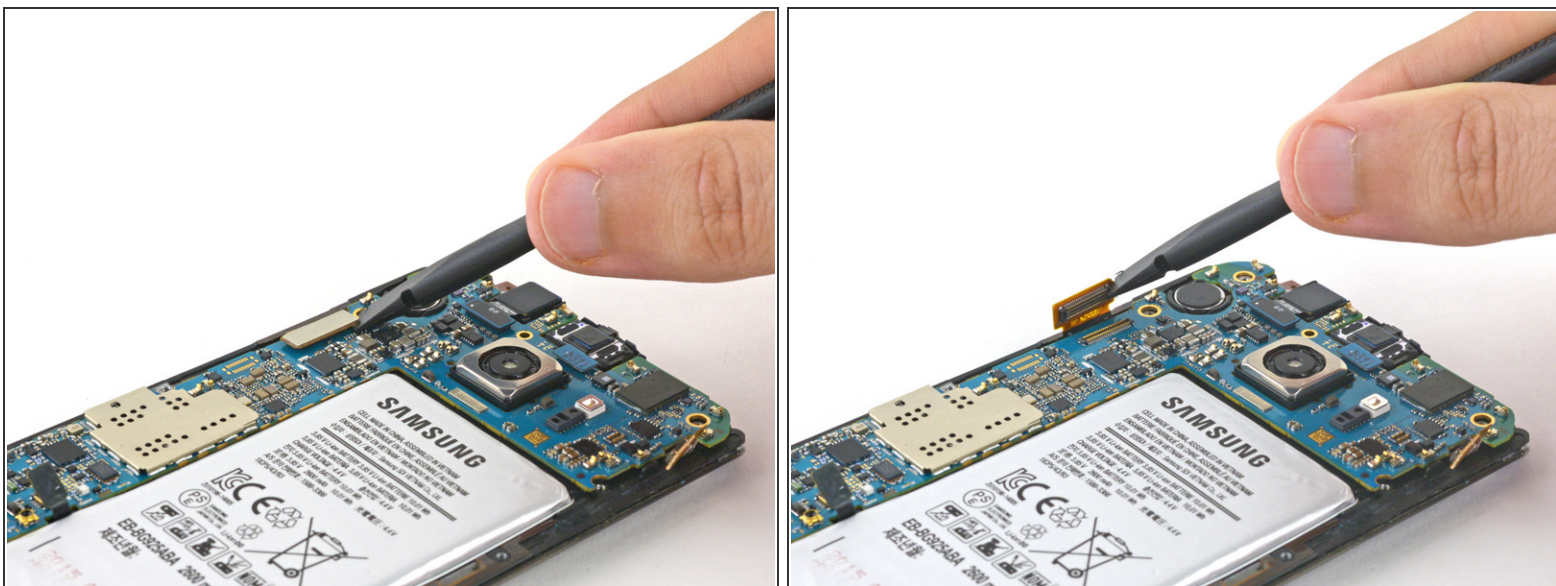


- Disconnect the display ribbon cable from the motherboard using the flat end of the spudger.

Step 5

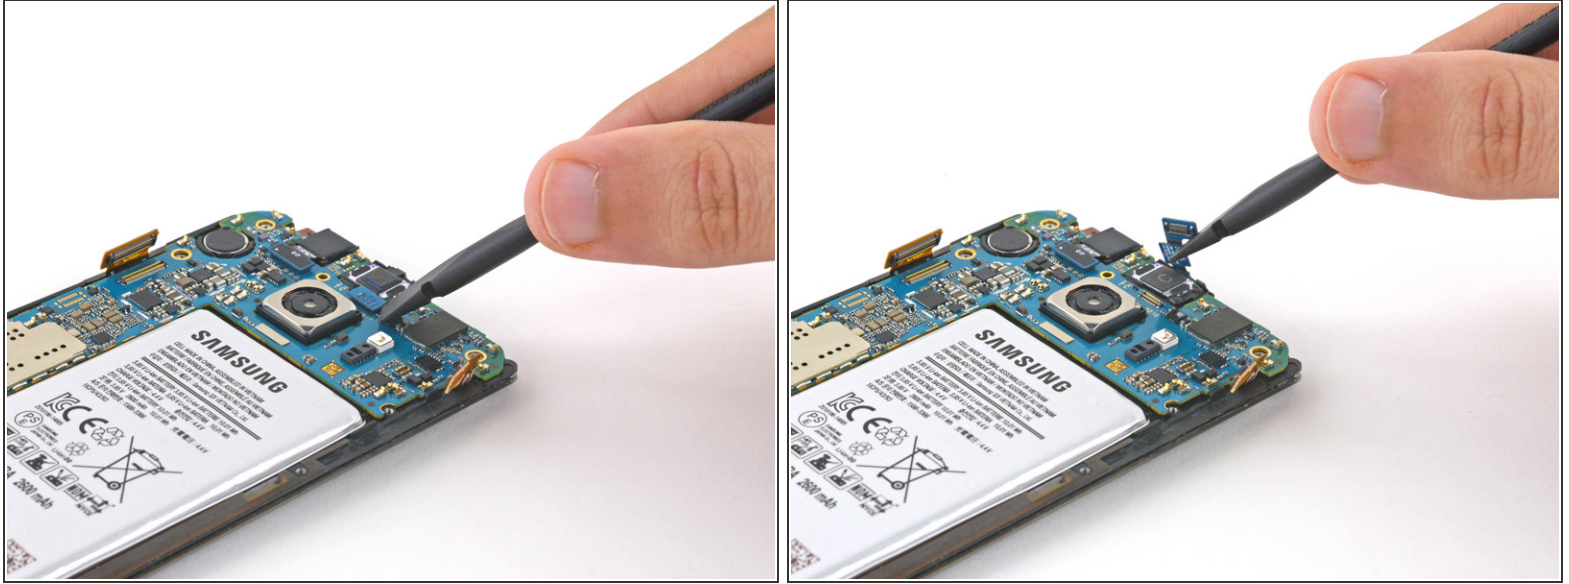

- Disconnect the earpiece ribbon cable from the motherboard.

Step 6

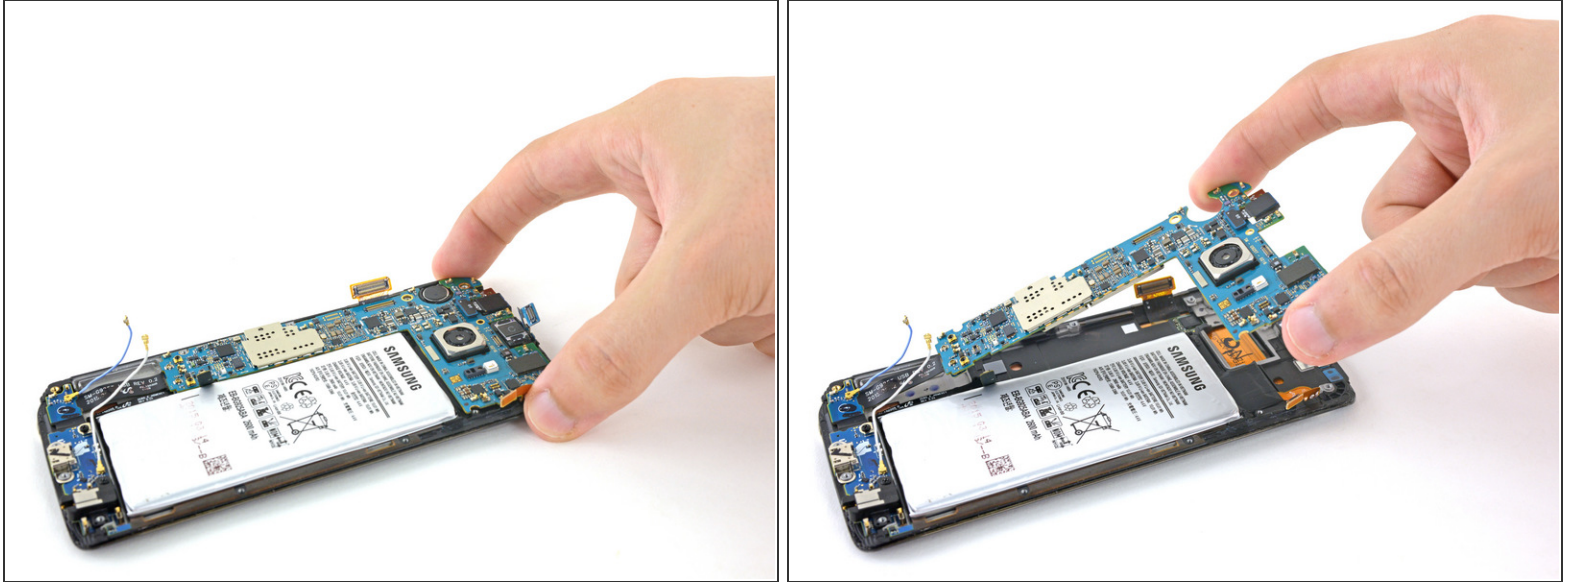



⚠ The motherboard is an ESD sensitive component and should be handled with care. iFixit recommends using an anti-static bracelet whenever handling components of this nature to avoid damage.

- Grip the motherboard on both edges toward the top of the device.

⚠ Do not lift the motherboard all the way out in this step; the ribbon cable on the underside needs to be disconnected first.

- Lift the motherboard up and away from the display, taking care not to put too much stress on the daughterboard ribbon cable.

Step 7

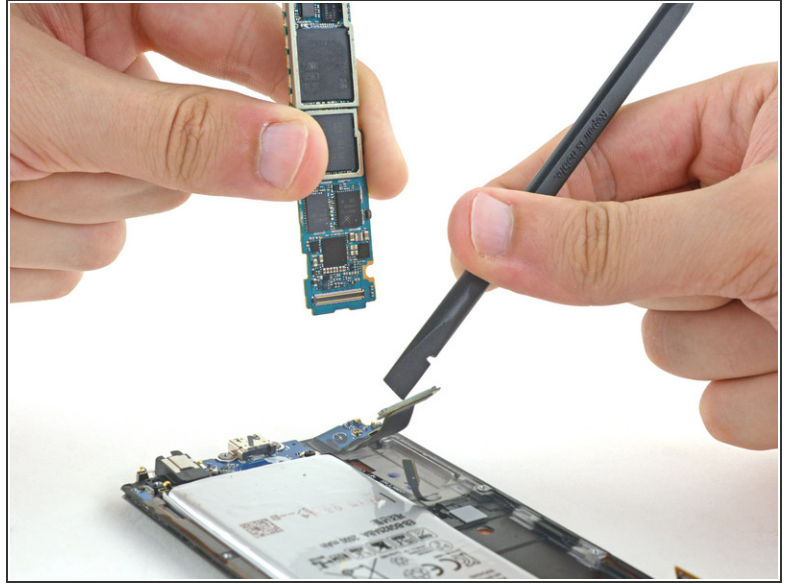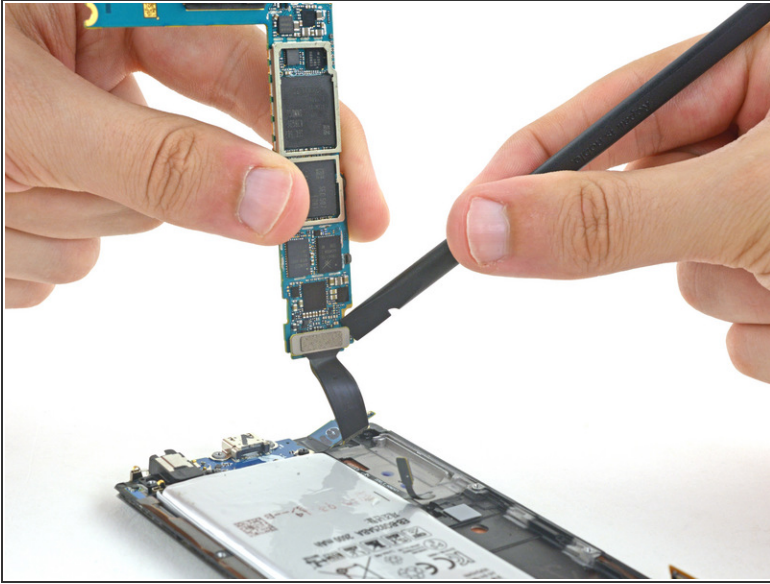

- Disconnect the daughterboard ribbon cable from the underside of the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 12:20:24 AM.